



GRIDSCALE AFRICA

QUOTE REFERENCE

GSA-6804B674

Reliable power. Lower energy costs. A sustainable future.

DATE

12 July 2026

SOLAR ENERGY PROPOSAL

Prepared for AHMED ATORISE · 12 July 2026

PREPARED FOR
AHMED ATORISE

VALID UNTIL
—

INSTALLER
Eye of Sauron

SYSTEM SIZE
6.0 kWp

PREPARED FOR

Customer

AHMED ATORISE

johns12@gmail.com · 09099912312

, Lagos

PREPARED BY

Solar Installer

Eye of Sauron

Nobunaga Satoru

kwizacsau@gmail.com

PROPOSED SYSTEM SIZE

6.0 kWp


15 x 400Wp panels

Battery	28.8 kWh
Inverter	5 kVA
Daily Demand	19.8 kWh
Peak Sun Hrs	3.8 hrs



1. Your Energy Solution

This system is designed to meet your daily energy needs reliably and reduce your dependency on the grid or generator.

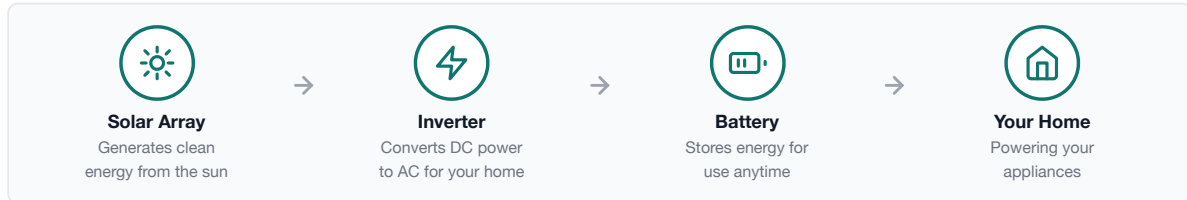

SYSTEM SUMMARY

Solar Array 6.0 kWp 15 x 400Wp panels	Battery Storage 28.8 kWh 6 x LiFePO4 100Ah/48V (28.8kWh total)	Inverter 5 kVA 5kVA inverter (4.0kW)	Daily Demand 19.8 kWh Effective daily load	Peak Sun Hours 3.8 hrs Location irradiance
---	--	--	--	--

EQUIPMENT SPECIFICATION

COMPONENT	SPECIFICATION	QTY	DETAILS
Solar Panels	400Wp Monocrystalline	15	Total 6.0kWp
Inverter	5kVA inverter (4.0kW)	1	Hybrid Inverter
Battery	6 x LiFePO4 100Ah/48V (28.8kWh total)	6	Total 28.8kWh
Mounting System	Aluminium Roof Mount	1	Complete Set
Protection & BOS	DC/AC Protection, Cables, etc.	1	Complete Set



Estimated System CAPEX (Before negotiation):

₦11,491,200



2. Investment Summary

COMPONENT & PRICING BREAKDOWN

DESCRIPTION	QTY	UNIT PRICE (₦)	TOTAL (₦)
2kVA Inverter	1	—	—
300Wp Solar Panel	1	—	—
100Ah/24V Lithium (LiFePO4) Battery	1	—	—
Subtotal			₦0
VAT (7.5%)			₦0
GRAND TOTAL			₦0

PAYMENT TERMS

To be agreed between parties.

WHAT'S INCLUDED

- ✓ Supply and installation of all listed components
- ✓ Commissioning and system testing
- ✓ Basic user training on system operation
- ✓ As-built documentation

WHAT'S EXCLUDED

- ✗ Civil or structural works
- ✗ Electrical upgrades beyond stated scope
- ✗ Permits and regulatory filings
- ✗ Annual maintenance (quoted separately)



3. Value & Performance

Financial projections are generated once a consumption assessment is linked to this quotation.



4. Terms, Warranty & Acceptance

WARRANTY



Solar Panels

25-year performance warranty

25 Years



Inverter

2–5 years (manufacturer warranty)

2–5 Years



Battery

5–10 years (subject to brand)

5–10 Years



Installation Workmanship

12 months from commissioning date

12 Months

TERMS

- ✓ This quotation is valid until —.
- ✓ Prices are subject to change after expiry due to component market fluctuations.
- ✓ A site assessment and final survey may be required before installation.
- ✓ Full terms & conditions apply.

PROJECT TIMELINE

Site Assessment

1–2 Days

Design & Approval

2–3 Days

Procurement

3–5 Days

Installation

5–7 Days

Testing & Handover

1 Day

Total Estimated

2–3 Weeks

ACCEPTANCE

I/We accept this proposal and authorise Eye of Sauron to proceed.

Customer

AHMED ATORISE

Signature: _____

Date: _____

For Eye of Sauron

Authorised Signatory

Signature: _____

Date: _____

Thank you for choosing Eye of Sauron.

We look forward to powering your world sustainably.

GRIDSCALE.AFRICA